



Acadia



Arbor



Ash



Fossil Gray



Oyster



Plantation



Stonehenge



Winchester

GALLERY SERIES NATCHEZ COLLECTION

2.0mm 8 mil Wear Layer –
 Glue Down with Square Edge
 2.5mm 20 mil Wear Layer –
 Glue Down with Microbevel

FEATURES & BENEFITS

- 6" x 48" planks
- 2.0mm/8 mil: 10-Year Residential Warranty From Date of Purchase
- 2.5mm/20 mil: Lifetime Residential Warranty, 10-year Commercial Warranty From Date of Purchase
- Durability, dependability, and clean designs
- Glue Down LVT is finished with an enhanced polyurethane finish, that provides superior scratch and scuffing resistance
- Cost effective LVT option that meets the needs of many of your flooring projects
- 100% phthalate free
- FloorScore® Certified

5.0mm SPC w/Acoustical Backing
 12 mil Wear Layer – Clic w/Microbevel
 5.2mm SPC w/Acoustical Backing
 20 mil Wear Layer – Clic w/Microbevel


FEATURES & BENEFITS

- 5.75" x 47.75" planks
- 5.0mm/12 mil: Lifetime Residential Warranty, 10-Year Light Commercial Warranty from Date of Purchase
- 5.2mm/20 mil: Lifetime Residential Warranty, 15-Year Light Commercial Warranty from Date of Purchase
- Durability, dependability, and clean designs
- SPC Clic LVT is finished with an enhanced polyurethane finish, that provides superior scratch and scuffing resistance
- Cost effective LVT option that meets the needs of many of your flooring projects
- 100% phthalate free
- FloorScore® Certified
- Easy to install clic locking system
- ASTM E90, ASTM E492 – Impact Insulation Class, Sound Transmission Class IIC = 58 STC = 52
- ASTM E2179 – Delta Impact Insulation Class: 6" Slab Only ΔIIC = 25



GLUE DOWN

Vinyl backing layer is highly resistant to pressure
 Middle vinyl layer for extra support
 Detailed print layer
 Transparent wear layer for high durability
 Enhanced polyurethane finish for superior scratch and abrasion resistance

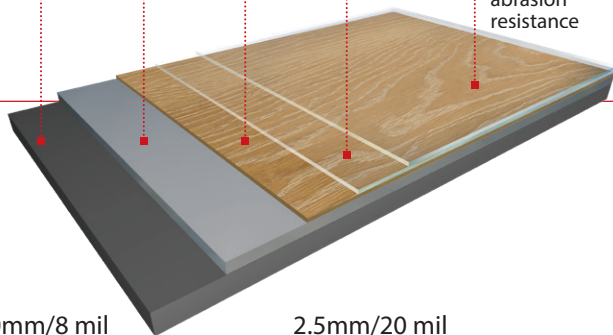


2.0mm/8 mil

2.5mm/20 mil

SPC CLIC

Acoustical backing for sound barrier and comfort
 SPC rigid core is waterproof and hides most subfloor imperfections
 Vinyl backing layer for pressure resistance
 Detailed print layer
 Transparent wear layer for high durability
 Enhanced polyurethane finish for superior scratch and abrasion resistance

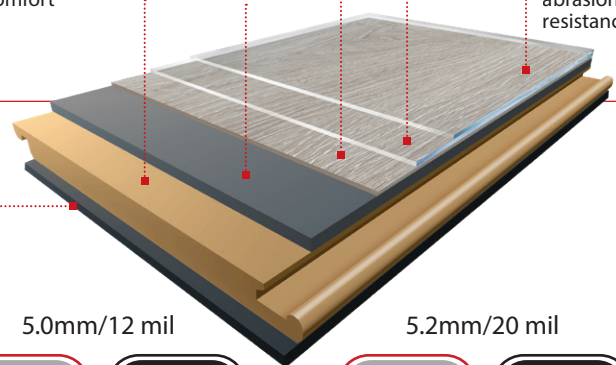

5.0mm/12 mil

5.2mm/20 mil

